


## Timber blade for ripping & cross cutting

The TKB blade produces a smooth, clean, fast cut with less load on your saw. The larger diamond ground Tungsten Carbide tips and thin kerf design can outlast 4-5 times the life of other blades and can be re-sharpened up to 5 times more.

### Designed to cut:

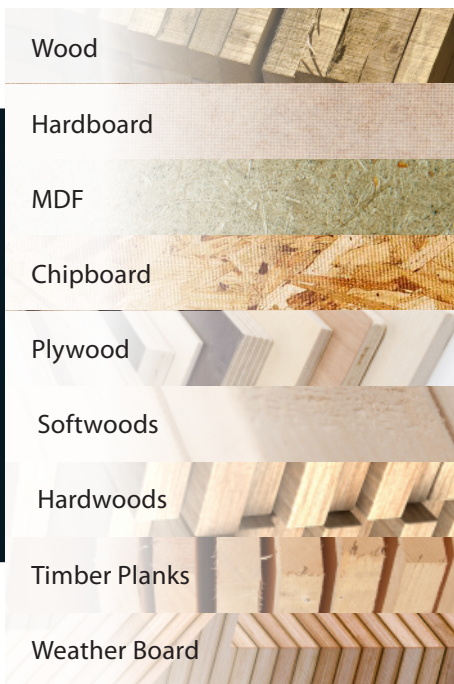

Made from the highest quality hardened tempered steel with reinforced large diamond ground Tungsten Carbide Tips.

### For use with Circular Saws, Table Saws, Portable Saws, Radial Arm Saws & Electric Mitre Saws

- Large diamond ground Tungsten Carbide Tips
- Thin kerf design
- Reinforced tips for added durability
- Hardened, tempered steel body
- Stress & heat resistant slots
- Anti corrosion & easy glide coating

| DIAMETER     | TEETH | PRODUCT CODE | BORE mm      | KERF / PLATE mm | MAX SPEED rpm | DIAGRAM REF. no. | BARCODE       |
|--------------|-------|--------------|--------------|-----------------|---------------|------------------|---------------|
| 140 mm (5½") | 20    | TKB1401620   | 20 / 16      | 2.2 / 1.4       | 8500          | 1                | 9313601000821 |
|              | 40    | TKB1401640   | 20 / 16      | 2.2 / 1.4       | 8500          | 2                | 9313601000838 |
| 150 mm (6")  | 20    | TKB1502020   | 20 / 16 / 10 | 2.2 / 1.4       | 8500          | 1                | 9313601003808 |
|              | 40    | TKB1502040   | 20 / 16 / 10 | 2.2 / 1.4       | 8500          | 2                | 9313601003815 |
| 160 mm (6¼") | 20    | TKB1602020   | 20 / 16      | 2.2 / 1.4       | 8500          | 1                | 9313601000401 |
|              | 40    | TKB1602040   | 20 / 16      | 2.2 / 1.4       | 8500          | 2                | 9313601000418 |
| 185 mm (7¼") | 20    | TKB1852020   | 20 / 16      | 2.2 / 1.4       | 8250          | 1                | 9313601000425 |
|              | 40    | TKB1852040   | 20 / 16      | 2.2 / 1.4       | 8250          | 2                | 9313601000432 |
|              | 60    | TKB1852060   | 20 / 16      | 2.2 / 1.4       | 8250          | 2                | 9313601005819 |
| 190 mm (7½") | 40    | TKB1902040   | 20           | 2.5 / 2.0       | 7900          | 2                | 9313601005802 |
| 210 mm (8")  | 20    | TKB2102520   | 25           | 2.4 / 1.6       | 7300          | 1                | 9313601000449 |
|              | 40    | TKB2102540   | 25           | 2.4 / 1.6       | 7300          | 2                | 9313601000456 |
| 235 mm (9¼") | 24    | TKB2352524   | 25           | 2.4 / 1.6       | 7000          | 1                | 9313601000142 |
|              | 40    | TKB2352540   | 25           | 2.4 / 1.6       | 7000          | 2                | 9313601000463 |
|              | 60    | TKB2352560   | 25           | 2.4 / 1.6       | 7000          | 2                | 9313601020072 |
|              | 40    | TKB2353040   | 30           | 2.4 / 1.6       | 7000          | 2                | 9313601005901 |
| 250 mm (10") | 24    | TKB2502524   | 25.4         | 2.6 / 1.8       | 7000          | 1                | 9313601000395 |
|              | 40    | TKB2502540   | 25.4         | 2.6 / 1.8       | 7000          | 2                | 9313601000487 |
|              | 60    | TKB2502560   | 25.4         | 2.6 / 1.8       | 7000          | 2                | 9313601000470 |
| 300 mm (12") | 24    | TKB3002524   | 25.4         | 2.8 / 2.0       | 6500          | 1                | 9313601003693 |
|              | 40    | TKB3002540   | 25.4         | 2.8 / 2.0       | 6500          | 2                | 9313601000494 |
|              | 60    | TKB3002560   | 25.4         | 2.8 / 2.0       | 6500          | 2                | 9313601000357 |
|              | 100   | TKB30025100  | 25.4         | 2.8 / 2.0       | 6500          | 2                | 9313601005833 |
| 350 mm (14") | 24    | TKB3502524   | 25.4         | 3.0 / 2.2       | 4500          | 1                | 9313601003709 |
|              | 40    | TKB3502540   | 25.4         | 3.0 / 2.2       | 4500          | 2                | 9313601000364 |
|              | 60    | TKB3502560   | 25.4         | 3.0 / 2.2       | 4500          | 2                | 9313601000371 |
|              | 100   | TKB35025100  | 25.4         | 3.0 / 2.2       | 4500          | 2                | 9313601005895 |

Custom bore sizes available




Diagram 1





Diagram 2

